






SUPERIOR DESIGN DRINK DISPLAY  
BLEND WITH EXECUTIVE LOUNGE BAR  
INTERIOR



Anti-condensation double layers ultra-clear and toughened glass door with heated film



304 grade black no.4 finish stainless steel table top (DBC models only)

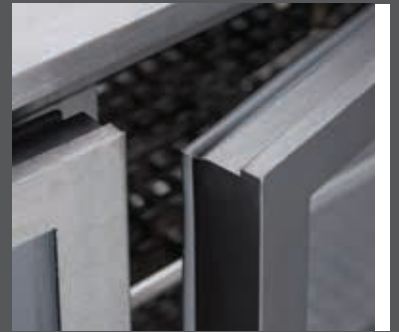

Invisible designed door handle and removable balloon type magnetic door gasket



Bright, warm white (2700K) LED lighting with on / off switch



Style ventilation opening at the bottom (DBC models only)



Adjustable perforated 304 grade stainless steel shelves





# Deluxe Beverage Cooler

New, contemporary and superior design beverage cooler especially for executive lounge bar



**DBC-2**

- 1 Deluxe Beverage Cooler
- 2 No. of compartments

<b>Model series</b>	<b>DBC</b> (Deluxe Beverage Cooler )
<b>No. of compartments</b>	1, 2, 3

<b>Model series</b>	<b>DBW</b> (Wall-mounted Deluxe Beverage Cooler )
<b>No. of compartments</b>	1, 2, 3



# Deluxe Beverage Cooler

DBC-1



DBC-2



DBC-3



## Standard Features

- Foodsafe 304 grade black no.4 finish stainless steel table top (DBC models only)
- Invisible designed door handle
- Anti-condensation double layers ultra-clear and toughened heated film glass doors
- V-cut bending for all visible bends provides superior exterior
- Foodsafe 304 grade black no. 4 finish stainless steel exterior and 304 grade BA mirror stainless steel interior
- Bright, warm white (2700K) LED lighting with on / off switch for excellent product display and easy customer selection
- Adjustable perforated 304 grade stainless steel shelves
- Anti-condensation door mullion heaters
- Operating temperature +4/+10°C
- Engineered with hidden condensing unit to fit with interior design and minimising the requested installation space
- Precision injection, high density polyurethane insulation. Provides excellent thermal efficiency with low GWP (Global Warming Potential) and zero ODP (Ozone Depletion Potential)
- Digital controller for easy operation and fail-safe performance, featuring clear digital display
- Automatic defrost ensures the evaporator working to its optimum performance
- Defrost water is vaporised with heat recovery vaporiser, no drain connection is required
- Efficient forced air refrigeration system
- Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress
- Galvanized steel exterior back and base

- 10Hmm levelling feet at front to ensure stability on an uneven floor and 15Hmm castors at rear (DBC models only)
- Environmental-friendly CFC-free refrigerant (R134a)
- HACCP compliant

## Options

- 304 grade black no.4 finish stainless steel exterior back/ base
- 304 grade black no.4 finish stainless steel door
- Additional shelving/ shelf supporters
- Different colours and finishes available
- 220V/60HZ/1PH



Model	DBC-1	DBC-2	DBC-3	DBW-1	DBW-2	DBW-3
<b>Temp Range (°C)</b>	+4/+10	+4/+10	+4/+10	+4/+10	+4/+10	+4/+10
<b>External Dims. (mm)</b>	W 600 D 600 H 800	W 900 D 600 H 800	W 1352 D 600 H 800	W 600 D 450 H 835	W 900 D 450 H 835	W 1352 D 450 H 835
<b>Internal Dims. (mm)</b>	W 530 D 376 H 630	W 830 D 376 H 630	W 1310 D 376 H 630	W 530 D 310 H 665	W 830 D 310 H 665	W 1282 D 310 H 665
<b>Door opening depth (mm)</b>	D 1160	D 1010	D 1010	D1005	D855	D855
<b>Capacity (cu.ft / litres)</b> <b>Capacity (cans @ 330ml)</b>	3.9 / 110 122	6.1 / 174 204	9.7 / 274 309	3.5 / 99 84	5.5 / 156 132	8.5 / 241 192
<b>Power supply</b>	220V/50HZ/1PH 13 amp plug	220V/50HZ/1PH 13 amp plug	220V/50HZ/1PH 13 amp plug	220V/50HZ/1PH 13 amp plug	220V/50HZ/1PH 13 amp plug	220V/50HZ/1PH 13 amp plug
<b>Power input Running (amps)</b>	2.4	2.4	4	2.7	2.7	4.4
<b>Rating Power (watts)*</b>	528	528	880	594	594	968
<b>Compressor (HP)</b>	1/5	1/5	1/4	1/5	1/5	1/4
<b>Heat rejection (watt) (Evaporating at -10°C in 32°C ambient)</b>	287	287	485	287	287	485
<b>Refrigerant</b>	R134a	R134a	R134a	R134a	R134a	R134a
<b>S/S perforated shelves Shelf supporters</b>	2 8	2 8	6 24	2 8	2 8	6 24

\*20% increase for 60HZ power supply

