

# Onyx Key Features

Innovative counter with raised pan holder - ideal for quick and easy food preparation



01. Unique airflow design with protective air curtain to ensure a 4°C food storage temperature of ingredients in raised pan holder



02. The working table top is sufficient for a 15" pizza dough



03. Removable, easy to clean crumb tray fitted

04. Excellent thermal efficiency, high density polyurethane insulation with Zero ODP (Ozone Depletion Potential) and Low GWP (Global Warming Potential)

05. Adjustable racking system allows flexible storage

06. Anti-condensation door mullion heaters

07. Removable anti-tilt trayslides to prevent tipping

08. Self-closing doors minimise cool air loss and reduce energy consumption




09. Over 90° door opening allows easy loading and stock checking

10. Removable balloon type magnetic door gasket with air release points provides an excellent seal to prevent heat ingress, easy replacement and avoiding dirt traps

11. 135Hmm heavy duty, non-marking swivel and braked castors for easy positioning
12. Forced air refrigeration system ensures effective air circulation
13. Imported, durable and energy-efficient compressor
14. Condenser and evaporator with Hydrophilic aluminium fins provides high corrosion resistance properties
15. Accurate helium leak detection system ensures the quality of the entire refrigeration system
16. Automatic defrost ensures the evaporator working to its optimum performance
17. Automatically vaporises defrost water, drainage is not required
18. Designed and engineered to operate up to 43°C ambient
19. Environmental-friendly CFC-free refrigerant (R134a)
20. HACCP compliant

Note: Products are NOT designed for outdoor application, please contact Williams team for any special requirement.

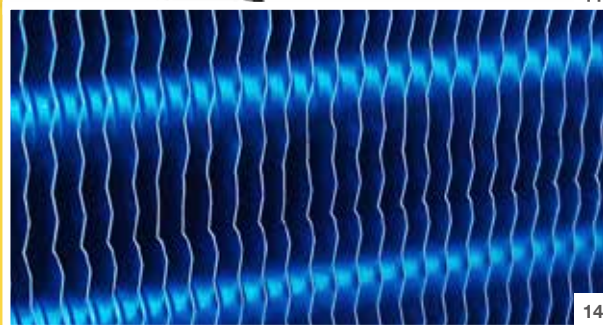

# Onyx

## Specification

- Accommodates 1/1 GN size in under counter
- Accommodates 1/3 GN size (150mm depth) in raised pan holder
- Foodsafe 304 grade stainless steel exterior and interior
- Fitted with 304 grade stainless steel lift off cover
- 1.2mm thick durable 304 grade stainless steel table top
- Galvanised steel exterior back and base
- Fitted with cylindrical lock for door(s)



## Options

1. 304 grade stainless steel exterior back / base
2. 2 drawers bank (Non GN size)
3. Cylindrical lock for drawer(s)
4. Lock plate
5. Internal LED for door type
6. Adjustable legs in lieu of castors
7. Additional shelving / trayslides for door type
8. 220V / 60HZ / 1PH



## Product List

CPC3(J)	CPC4(J)	CPC5(J)
		

# Onyx Technical Data

Model	CPC3(J)	CPC4(J)	CPC5(J)
<b>Temp Range (°C)</b>			
Under counter	+1 / +4	+1 / +4	+1 / +4
Raised pan holder with cover	+4	+4	+4
<b>External Dimension (mm)</b>			
Width	1420	1885	2350
Depth (including 50mm rear bracket)	909		
Height	1100		
<b>Internal Dimension (mm)</b>			
Width	1320	1785	2250
Depth	575		
Height	605		
<b>Thickness of 304 grade stainless steel (mm)</b>			
Exterior	0.7		
Interior	0.6		
Door or drawer	0.8		
<b>Opening Depth (mm)</b>			
Door type (including 50mm rear bracket)	1330		
Drawer type (including 50mm rear bracket)	1400		
<b>Maximum loading height of drawer (mm per drawer)</b>			
2 drawers bank	225		
<b>Capacity</b>			
Under counter (cu.ft / litres)	22.6 / 642	30.6 / 868	38.6 / 1094
Raised pan holder (1/3 GN pan)	7	10	12
<b>Power Supply</b>		220V / 50HZ / 1PH	
		13 amp plug	
<b>Power Input - Running (amps) *</b>			
Door or drawer type	5.7	7.5	8
<b>Rating Power (watts) *</b>		1254	1650
		1760	
<b>Compressor (HP)</b>			
Door or 2 drawers bank	3/4		1
<b>Heat Rejection (watts) (Evaporating at -10°C in 32°C ambient)</b>			
Door or 2 drawers bank	1289		1816
<b>Refrigerant</b>		R134a	
<b>Standard fittings</b>			
PE coated shelves #	6	8	10
Trayslides (pair) #	6	8	10
Cover	2		3
GN pan bridging bar	6	9	11

\* 20% increase for 60HZ power supply

# Not applicable for drawer type