




www.williams-refrigeration.com.hk

an Ali Group Company



The Spirit of Excellence



Front-of-House Display Showcase Solutions



Williams Refrigeration


Front-of-House

Display Showcase Solutions



Design Excellence Cool Technology

Williams Refrigeration is one of the world's leading designers and manufacturers of professional refrigeration equipment

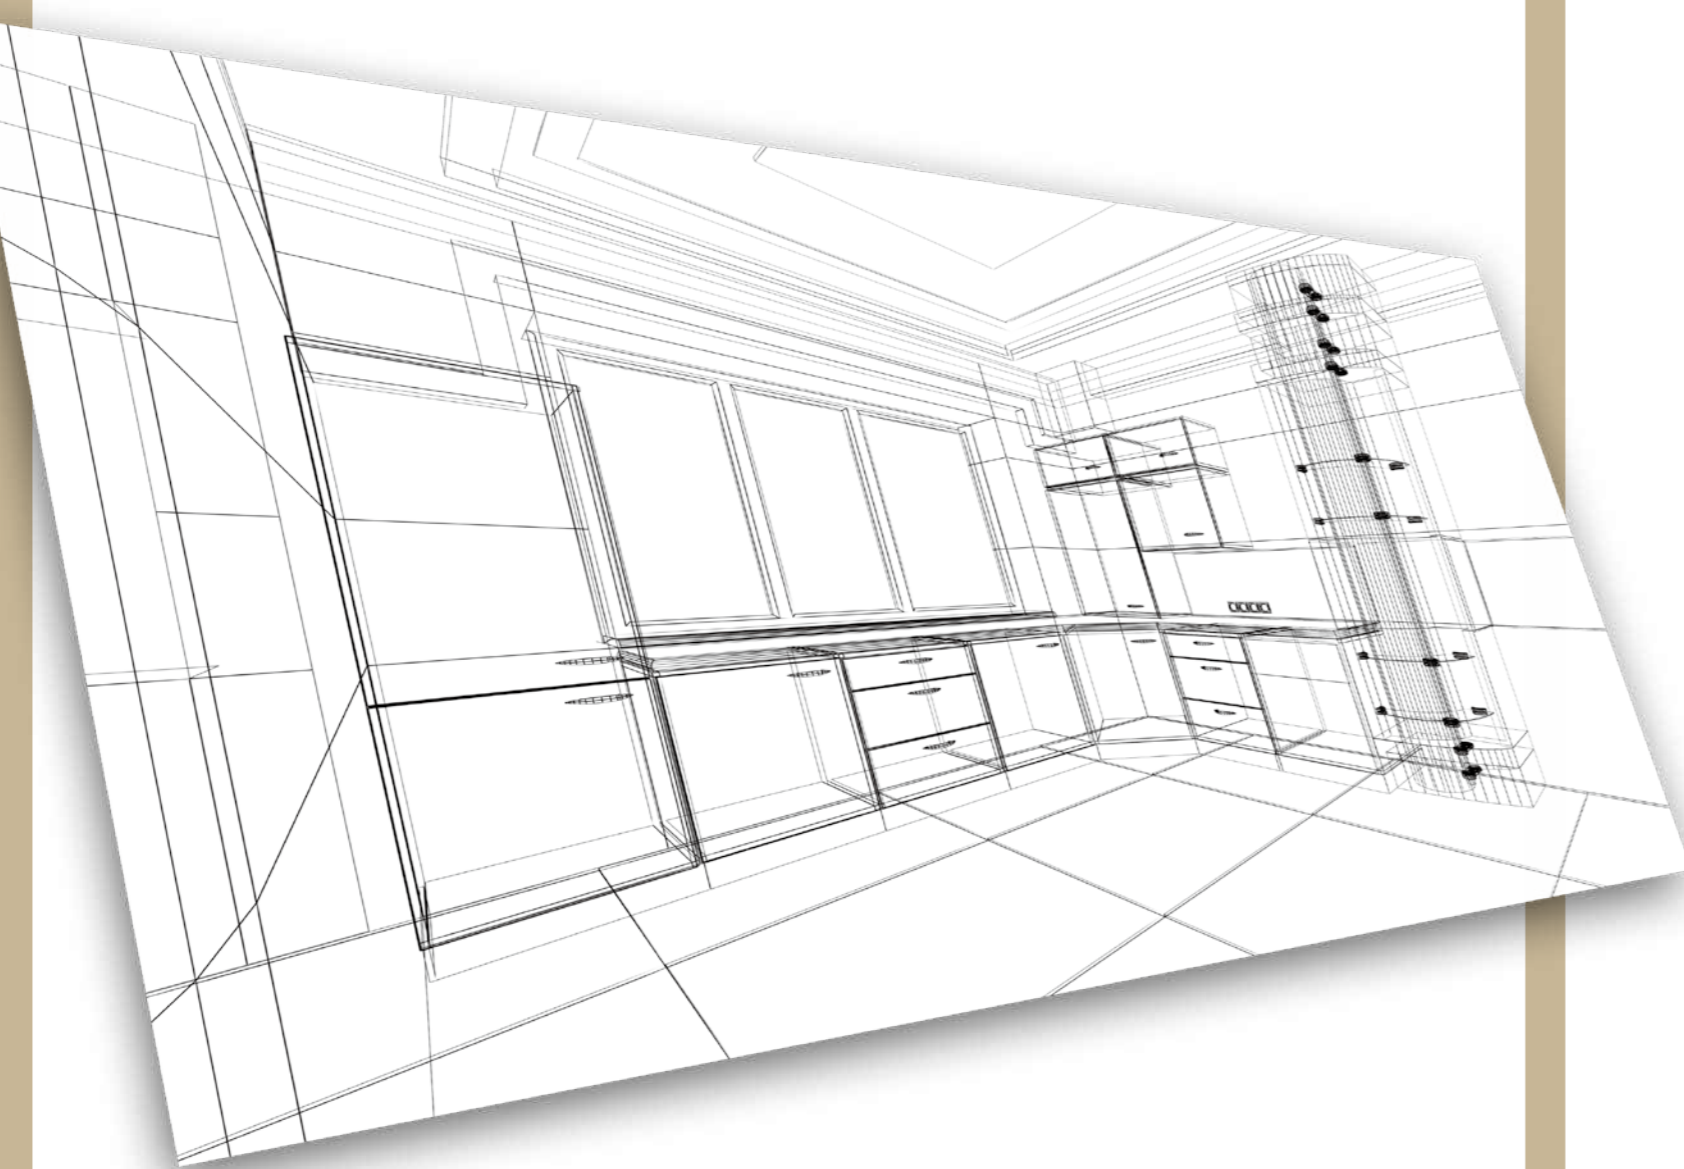

Index

About Williams	<u>02</u>
Introduction	<u>06</u>
Front-of-House General Features	<u>08</u>
Cake Display Showcase	<u>10</u>
Sushi Display Showcase	<u>16</u>
Ice Cream Display Showcase	<u>22</u>
Jewellery Box Type Display Showcase	<u>28</u>
FOH Meat Ageing Display Showcase	<u>34</u>
FOH Counter Refrigerator	<u>40</u>
Wine Display Tower	<u>46</u>
Deluxe Beverage Cooler	<u>52</u>
Upright Display Showcase	<u>58</u>
Ice Well, Cold Well, Frost Top	<u>64</u>
Reach-in Open Display Showcase	<u>70</u>
Stairway Display Showcase	<u>74</u>
Williams Capability	<u>78</u>
Our Commitment - Greenlogic	<u>86</u>
Contact List	<u>87</u>

Williams Refrigeration was established at UK Kings Lynn in 1980 and is now one of the world's leading designers and manufacturers of innovative and award winning professional refrigeration.



Best Performance and Quality

Williams has built a global reputation over 35 years for performance, quality, and value for money

At the heart of the Williams business is its reputation for excellence.

The global business is driven by the vision and inspiration of the Head Office team in UK Kings Lynn and the resources and expertise offered by the technical teams at Williams' manufacturing locations. Williams has one of the industry's most highly skilled and experienced design teams, delivering new concepts and solutions that continue to lead the market.



Innovative and Excellent Design



Food Safety and Hygiene

Our commitment is to help customers meet the demands of complex legislation for food safety and energy efficiency, together with competitive pricing, professional advice and innovative design.

Greenlogic is Williams' commitment to supplying the most energy efficient and sustainable commercial refrigeration in today's market. It covers our plant, manufacturing and management also.



Energy and Environmental Awareness



Reliability

All products are built for performance, reliability and durability, even in the toughest and most arduous of conditions.

Williams' focus on service and support has led us to attract some of the world's leading companies as customers.



Global Products, Local Service

Worldwide Sales Offices

United Kingdom (Headquarter)
 China
 Hong Kong
 Australia
 Dubai

Fully equipped with **Product Know-how**.
 Professional Support in **Pre-sales Service, Product Design, and After-sales Service**.

International Production Plants

United Kingdom
 China
 Australia

Focus in **Systematic Production, Professional R&D**, and the **Best Quality Control**.

Production Plant in China

ISO9001:2015 (Quality Management System)
 ISO14001:2015 (Environment Management System)
 ISO22000:2005 (Food Safety Management System)
 ISO45001:2018 (Occupational Health & Safety Management System)
 QS (China Quality and Safety Mark)
 WCA (Workplace Conditions Assessment)



SAME set up as UK production plant

- Manufacturing template
- CAD and latest advanced machinery
- Testing and QA process
- Component selection and standard
- Compliance
- Key parts specification (International prestigious brands)
- Professional European Standard R&D testing laboratories

Quality Assurance

Williams is strict in **QUALITY CONTROL**, from rigorous selection of registered suppliers to incoming materials, products quality check after each process, and also the final products prior to leaving factory.

Our Products

CE, WEEE and RoHS
 CCC (China Compulsory Certification)
 SASO (Saudi Arabian Standard Organization Certification)
 KC (Korea Certification)



Design Excellence : Cool Technology

WILLIAMS REFRIGERATION – THE NAME SYNONYMOUS WITH QUALITY, PERFECTION AND RELIABILITY

Williams' commitment to innovation and continuous improvement has led them to be one of the world's leading manufacturers of commercial refrigeration. Working closely with users, engineers and designers, Williams has succeeded time and again in providing reliable, high quality refrigeration solutions to the market.

Now Williams has succeeded in providing a whole range of products to meet the growing demand for high quality Front of House refrigerated display.

The range is not limited to products outlined in the following pages. We can provide a solution for visually any application, tailored to suit varying temperatures, materials, colours and orientation, and to fit almost any footprint. So, whatever your application is, talk to Williams!

The new display range is a well balance of aesthetics and functionality, incorporating Williams superior refrigeration technology with specialised features such as ultra-clear glass, V-cut bendings and invisible handles.




Front-of-House General Features



1 Superior V-cut bending for all visible bendings including louvre



2 Internal warm white (2700K) LED lighting with diffuser



3 Foodsafe 304 grade colour stainless steel exterior and interior



4 Invisible designed door handle with balloon type magnetic gasket



6 Frameless 45° mitre joint for top and front glasses to enhance visibility




8 Efficient forced air flow to keep the expected foodsafe temperature



5 Anti-condensation double layer ultra-clear toughened heated glass



7 Hydrophilic coated aluminium evaporator ensures the high corrosion resistance properties



9 High density insulation foam with zero ODP and low GWP to provides excellent thermal efficiency and is environmental-friendly

10 Easy-operating digital controller features with clear digital display and fail-safe performance



Cake Display Showcase

People love to indulge in delicious cakes due to the good taste and sophisticated look. Chefs produce cakes with artistic talent. People often shop with their eyes. A well-designed cake display showcase always enhance the appearance.



1 CAKE - 2 U - 3 1500 - 4 HG(D700)

1 Model	CAKE (Cake Display Refrigeration)
2 Condensing unit & louvre type	U (Self-contained with V-cut bending louvre) B (Self-contained with stand) R (Remote)
3 Width	900 (900mm), 1200 (1200mm), 1500 (1500mm), 1800 (1800mm)
4 Configuration	HG (Double layer ultra-clear toughened heated glass) D700 (700mm depth) C (Curved front glass)



Fitted with optional LED holder
(other option: spot light stand)

Glass Case Height
Rectangular : 530 mm
Curved : 750 mm

Cake Display Showcase

(Ambient temperature requested : 25°C)

Model	External Dim. (mm)
-------	--------------------

CAKE-U-900-HG	900x850x1100H
CAKE-U-900-HG(D700)	900x700x1100H
CAKE-U-900-HG-C	900x700x1400H
CAKE-U-1200-HG	1200x850x1100H
CAKE-U-1200-HG(D700)	1200x700x1100H
CAKE-U-1200-HG-C	1200x700x1400H
CAKE-U-1500-HG	1500x850x1100H
CAKE-U-1500-HG(D700)	1500x700x1100H
CAKE-U-1500-HG-C	1500x700x1400H
CAKE-U-1800-HG	1800x850x1100H
CAKE-U-1800-HG(D700)	1800x700x1100H
CAKE-U-1800-HG-C	1800x700x1400H

Temperature Range (°C)

+5 / +8

* Custom-made size is available

304 grade colour S/S frame



Sliding doors with heated glass



45° mitre joint of top & front glass



2700K LED light under display base



V-cut for all visible bendings



Hidden shelf support





Inevitable attraction to pastry lovers
Cake Display
Reference





Sushi Display Showcase

Combined the sleek design and excellent cooling performance, the showcase keeps the sashimi or sushi fresh and also work up an appetite.



SUS-R-1500-HG

1 Model	SUS (Sushi Display Refrigeration)
2 Condensing unit & louvre type	U (Table top self-contained) R (Remote) B (Self-contained with stand)
3 Width	1200 (1200mm), 1500 (1500mm), 1800 (1800mm)
4 Configuration	HG (Double layer ultra-clear toughened heated glass)



Glass Case Height : 250 mm



Table top self-contained


Sushi Display Showcase (19ømm drainage)

(Ambient temperature requested : 25°C)

Model	External Dim. (mm)
SUS-U-1200-HG	1200x350x325H
SUS-R-1200-HG	1200x350x325H
SUS-B-1200-HG	1200x350x825H
SUS-U-1500-HG	1500x350x325H
SUS-R-1500-HG	1500x350x325H
SUS-B-1500-HG	1500x350x825H
SUS-U-1800-HG	1800x350x325H
SUS-R-1800-HG	1800x350x325H
SUS-B-1800-HG	1800x350x825H

Temperature Range (°C)
+1 / +4

* Custom-made size is available

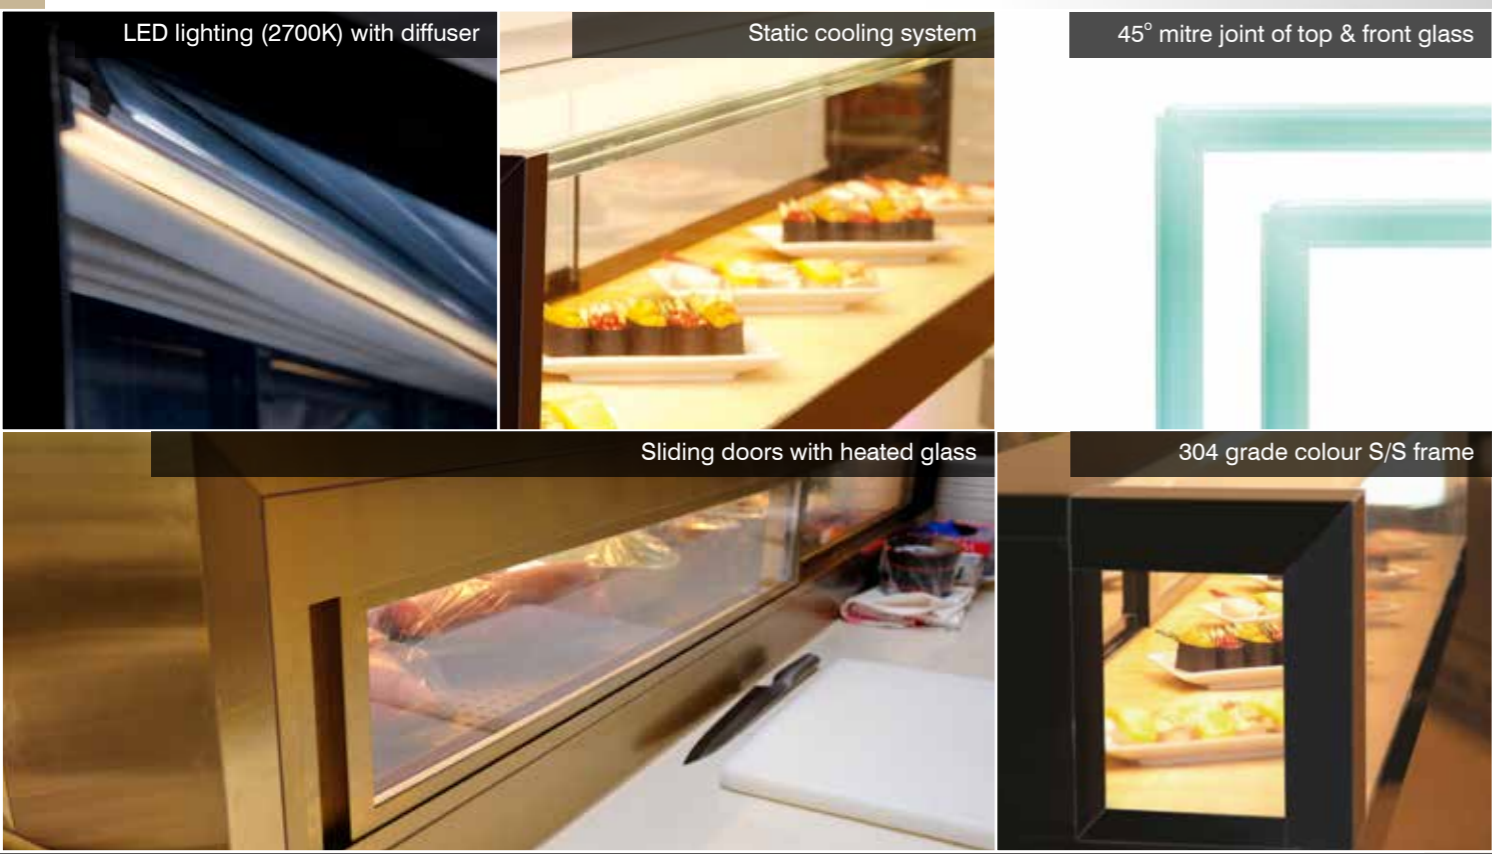

LED lighting (2700K) with diffuser

Static cooling system

45° mitre joint of top & front glass

Sliding doors with heated glass

304 grade colour S/S frame



Functionality blended with aesthetic exterior

Sushi Display Reference





Ice Cream Display Showcase

Quality ingredients plus professional craftsmanship to make the delicious ice cream, contemporary design plus reliable cooling performance to display the irresistible ice cream.

1 IC - **2** U - **3** 1200 - **4** HG

1 Model	IC (Ice Cream Display Refrigeration)
2 Condensing unit & louver type	U (Self-contained with V-cut bending louvre) B (Self-contained with stand) R (Remote)
3 Width	900 (900mm), 1200 (1200mm)
4 Configuration	HG (Double layer ultra-clear toughened heated glass) C (Curved front glass)



Glass Case Height
Rectangular : 380 mm
Curved : 750 mm

Ice Cream Display Showcase

(Ambient temperature requested : 25°C)

Model **External Dim. (mm)**

IC-U-900-HG 900x700x1140H

IC-U-900-HG-C 900x700x1400H

IC-B-900-HG 900x700x1140H

IC-B-900-HG-C 900x700x1400H

IC-R-900-HG 900x700x800H

IC-R-900-HG-C 900x700x1000H

IC-U-1200-HG 1200x700x1140H

IC-U-1200-HG-C 1200x700x1400H

IC-B-1200-HG 1200x700x1140H

IC-B-1200-HG-C 1200x700x1400H

IC-R-1200-HG 1200x700x800H

IC-R-1200-HG-C 1200x700x1000H

* Custom-made size is available

Temperature Range (°C)

-18 / -20

Ultra-clear toughened heated glass



Sliding doors with heated glass



45° mitre joint of top & front glass



V-cut for all visible bendings



LED lighting (2700K) with diffuser



Contemporary marble worktop





Irresistible to ice cream enthusiasts all over the world

Ice Cream Display Reference





Jewellery Box Type Display Showcase

Inspired by the jewellery shop and high-end fashion boutiques, the jewellery box type display showcase is perfect for gorgeous creations especially for pastries and chocolates.



¹ JB - ² U - ³ 1200 - ⁴ HG

1 Model	JB (Jewellery Box Type Display Refrigeration)
2 Condensing unit & louvre type	U (Self-contained with V-cut bending louvre) B (Self-contained with stand) R (Remote)
3 Width	600 (600mm), 1200 (1200mm)
4 Configuration	HG (Double layer ultra-clear toughened heated glass)



Fitted with optional LED holder
(other option: spot light stand)

Glass Case Height : 300 mm

Jewellery Box Type Display Showcase

(Ambient temperature requested : 25°C)

Model	External Dim. (mm)
JB-U-600-HG	600x700x1100H
JB-B-600-HG	600x700x1100H
JB-R-600-HG	600x700x560H
JB-U-1200-HG	1200x700x1100H
JB-B-1200-HG	1200x700x1100H
JB-R-1200-HG	1200x700x560H

Temperature Range (°C)

Chocolate
+12 / +16

Cake
+5 / +8

Above configurations for selection



Ultra-clear toughened heated glass



Invisible drawer handle



45° mitre joint of top & front glass



2700K LED light under display base



V-cut for all visible bendings



Ultra-thin drawer gasket

* Custom-made size is available



Indulges the pastry & chocolate lovers

Jewellery Box Type Display Reference





Meat Ageing Display Showcase

Designed to enhance the flavor and tenderness of premium meats, this display showcases the natural aging process, bringing out rich, deep flavors in every cut. Perfect for gourmet enthusiasts and chefs who appreciate the finest quality meats.



FOH-MAR¹1-WS²

1 Model	FOH-MAR (Front-of-House Meat Ageing Display Refrigeration)
2 No. of compartments	1 (1 door and 737Wmm) 2 (2 doors and 1400Wmm)
3 Configuration	WS (with Signature profile)



Meat Ageing Display Showcase


(Ambient temperature requested : 25°C)

Model	External Dim. (mm)
FOH-MAR1-WS	737x824x1975H
FOH-MAR2-WS	1400x824x1975H
FOH-MAR1	737x824x1975H
FOH-MAR2	1400x824x1975H

Temperature Range (°C)
+1 / +4


Relative Humidity (%)
60 - 85

* Custom-made size is available

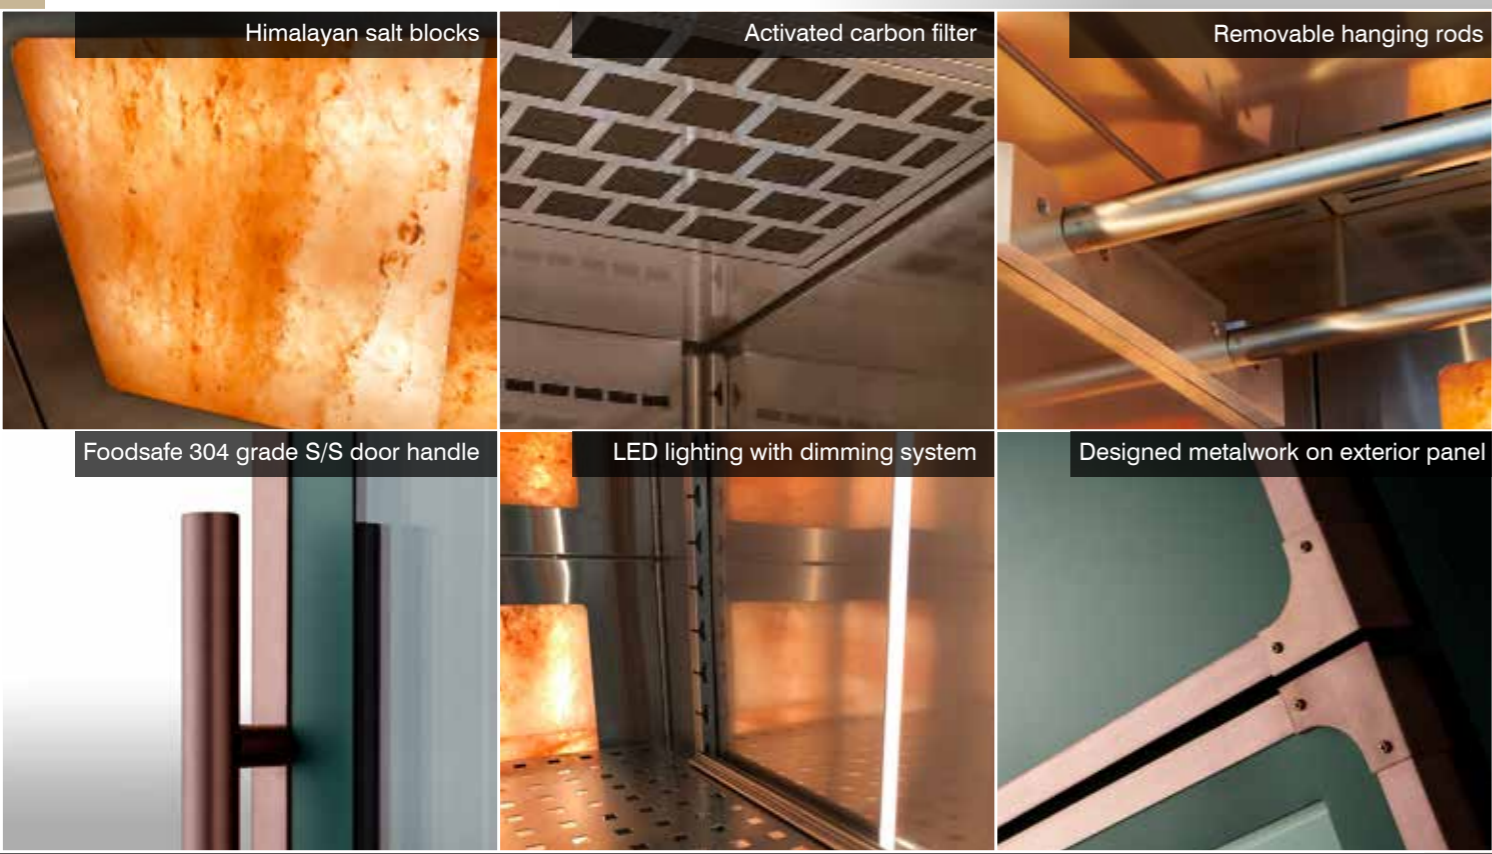



Experience the art of dry-ageing
**Meat Ageing
Display
Reference**

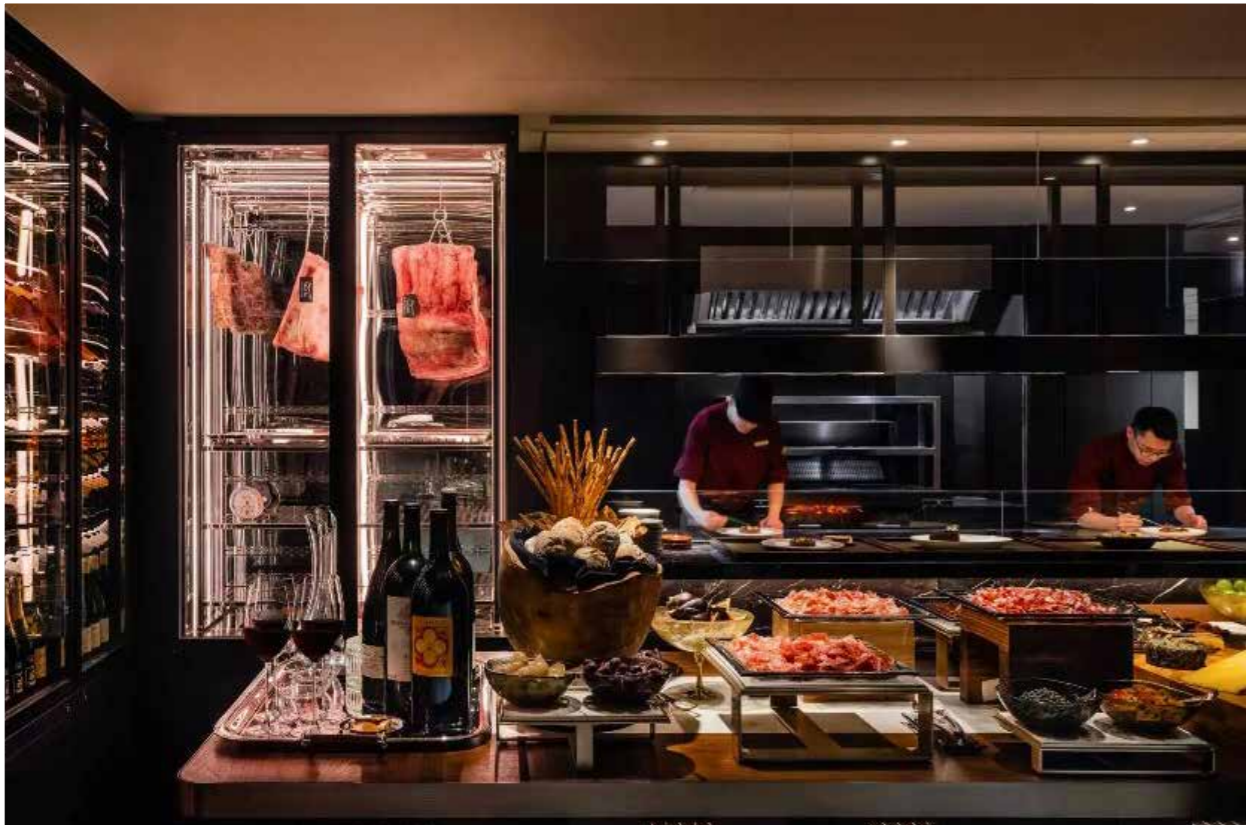



FOH Counter Refrigerator

Sleek refrigeration counter design enhances your stylish open kitchen concept and blends with your interior design perfectly.



Self-contained with V-cut louvre



Self-contained with hidden louvre

FOH-HL-2U-XDD

1 Model	FOH-HL (Front-of-House Counter Refrigerator with hidden louvre for self-contained unit) FOH(L)-HL (Front-of-House Counter Freezer with hidden louvre for self-contained unit) FOH (Front-of-House Counter Refrigerator) FOH(L) (Front-of-House Counter Freezer)
2 No. of compartments	Self-contained - 1 (1036Wmm), 2 (1549Wmm), 3 (2062Wmm) Remote - 1 (508Wmm), 2 (1036Wmm), 3 (1549Wmm)
3 Condensing unit & louvre type	U (Self-contained) R (Remote)
4 Configuration	D660 (660mm counter depth) X (Location of condensing unit) D (Door) N (2 drawers bank)

FOH Counter Refrigerator

(19ømm drainage for remote type) (Ambient temperature requested : 25°C)

Model	External Dim. (mm)
FOH-HL-1U	1036x750x750H
FOH(L)-HL-1U	1036x750x750H
FOH-1R	508x750x750H
FOH(L)-1R	508x750x750H
FOH-HL-2U	1549x750x750H
FOH(L)-HL-2U	1549x750x750H
FOH-2R	1036x750x750H
FOH(L)-2R	1036x750x750H
FOH-HL-3U	2062x750x750H
FOH(L)-HL-3U	2062x750x750H
FOH-3R	1549x750x750H
FOH(L)-3R	1549x750x750H

Temperature Range (°C)

Chiller

+1 / +4

Freezer

-19 / -22

FOH-HL-3U and FOH(L)-HL-3U need to reserve 100mm space at CDU side for ventilation
* Custom-made size is available





Embodies practicality and performance excellence

FOH Counter Reference





Wine Display Tower

A sophisticated and stylish wine display tower enhances the ambiance of fine dining area and makes the dining experience perfect.

¹ WT - ² HD - ³ 1500 - ⁴ I

1 Model	WT (Wine Display Tower)
2 Door type	HD (Hinged door)
3 Width	750 (750mm), 1500 (1500mm)
4 Depth	I (700mm depth with two-sided wine displaying)



Wine Display Tower

(Ambient temperature requested : 25°C)

Model	External Dim. (mm)
WT-HD-750	750X500X2700H
WT-HD-750-I	750X700X2700H
WT-HD-1500	1500X500X2700H
WT-HD-1500-I	1500X700X2700H


Temperature Range (°C)

Red Wine
+12 / +16

White Wine
+9 / +12

Champagne
+5 / +9

Above configurations for selection

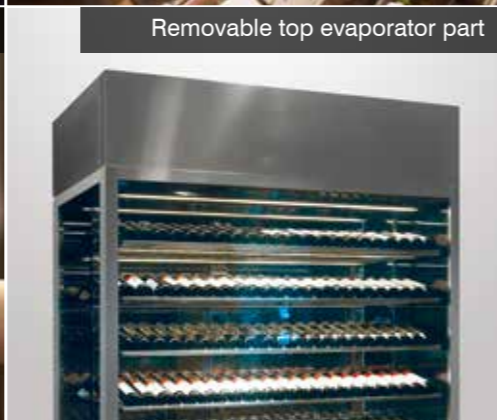


* Custom-made size is available



Display wine in spectacular way

Wine Display Reference



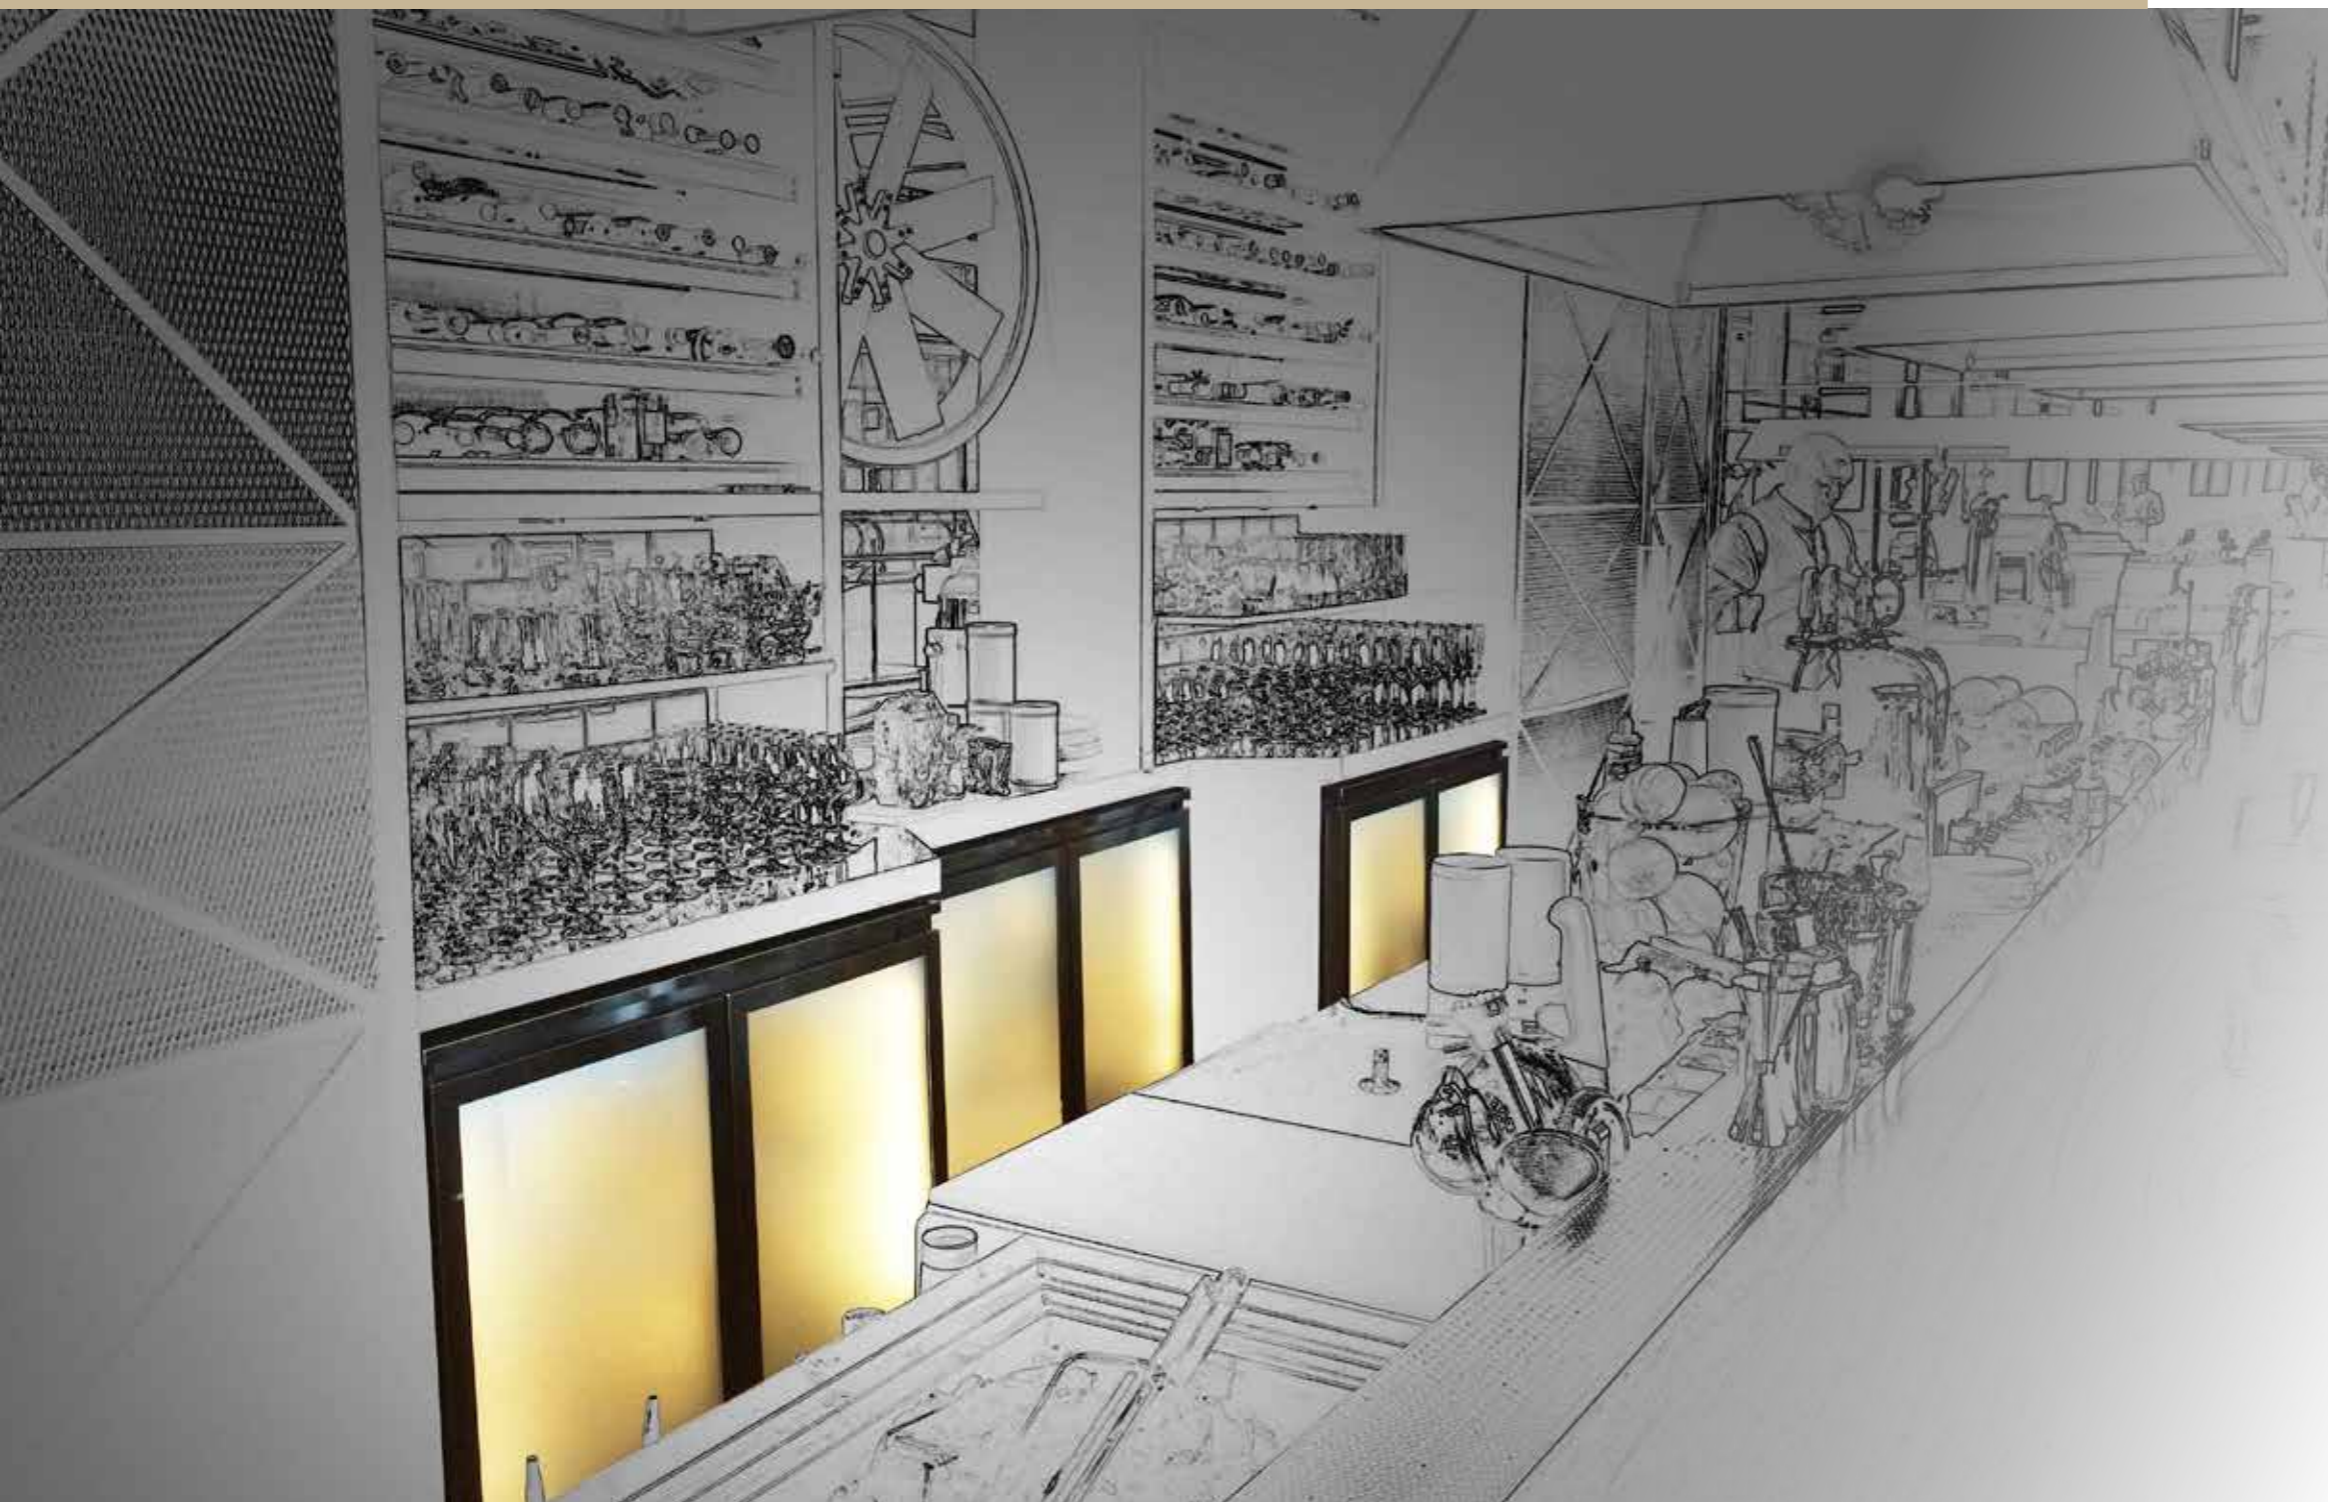

Deluxe Beverage Cooler

Superior design beverage display mixed with the interior of executive lounge bar to create unique and stylish ambiance for your guests.

DBC-200W

DBW

DBT

1 DBC - **2** 95 - **3** W - **4** PR - **5** DT

1 Model	DBC (Deluxe Beverage Cooler) DBT (Table top Deluxe Beverage Cooler) DBW (Wall-mounted Deluxe Beverage Cooler)
2 No. of compartments	1, 2, 3 95 (Upright 1 compartment) 200 (Upright 2 compartments)
3 Specific for Wine	W
4 Wine Rack type	PR (Pull-out type wooden wine rack) DR (Diamond type wooden wine rack)
5 Duel Temperature	DT



DBC



DBC-95W

Deluxe Beverage Cooler

(Ambient temperature requested : 25°C)

Model	External Dim. (mm)
DBC-1	600x600x800H
DBC-2	900x600x800H
DBC-3	1352x600x800H
DBT-1	600x600x835H
DBT-2	900x600x835H
DBT-3	1352x600x835H
DBW-1	600x450x835H
DBW-2	900x450x835H
DBW-3	1352x450x835H
DBC-95	645x635x1770H
DBC-95W-DR	645x635x1770H
DBC-95W-PR	645x635x1770H
DBC-95W-PR-DT	645x635x1770H
DBC-200	1290x635x1770H
DBC-200W-DR	1290x635x1770H

Temperature Range (°C)	
Beverage	
+4	+10
Wine	
+4	+22
Duel-Temp	
+7	+10
Upper section	
+12	+16
Lower section	
Above configurations for selection	

Ultra-clear toughened heated glass

304 grade S/S table top (DBC only)

Invisible door handle

Warm white LED lighting (2700K)

Stylish ventilation skirting (DBC only)

Adjustable perforated 304 S/S shelf

* Custom-made size is available



Designed especially for executive lounge bar
Deluxe Beverage
Reference





Upright Display Showcase

Fresh and quality ingredients are not limited to storage in back kitchen. Showing to public is another choice now!



FOH-UP-1T

1 Model	FOH-UP (Front-of-House Upright Display Refrigeration)
2 Configuration	1T (1 door and 750Wmm) 2T (2 doors and 1500Wmm)




Fitted with optional stainless steel baskets with removable slanted shelves

Upright Display Showcase

(Ambient temperature requested : 25°C)

Model	External Dim. (mm)
FOH-UP-1T	750x800x2400H
FOH-UP-2T	1500x800x2400H

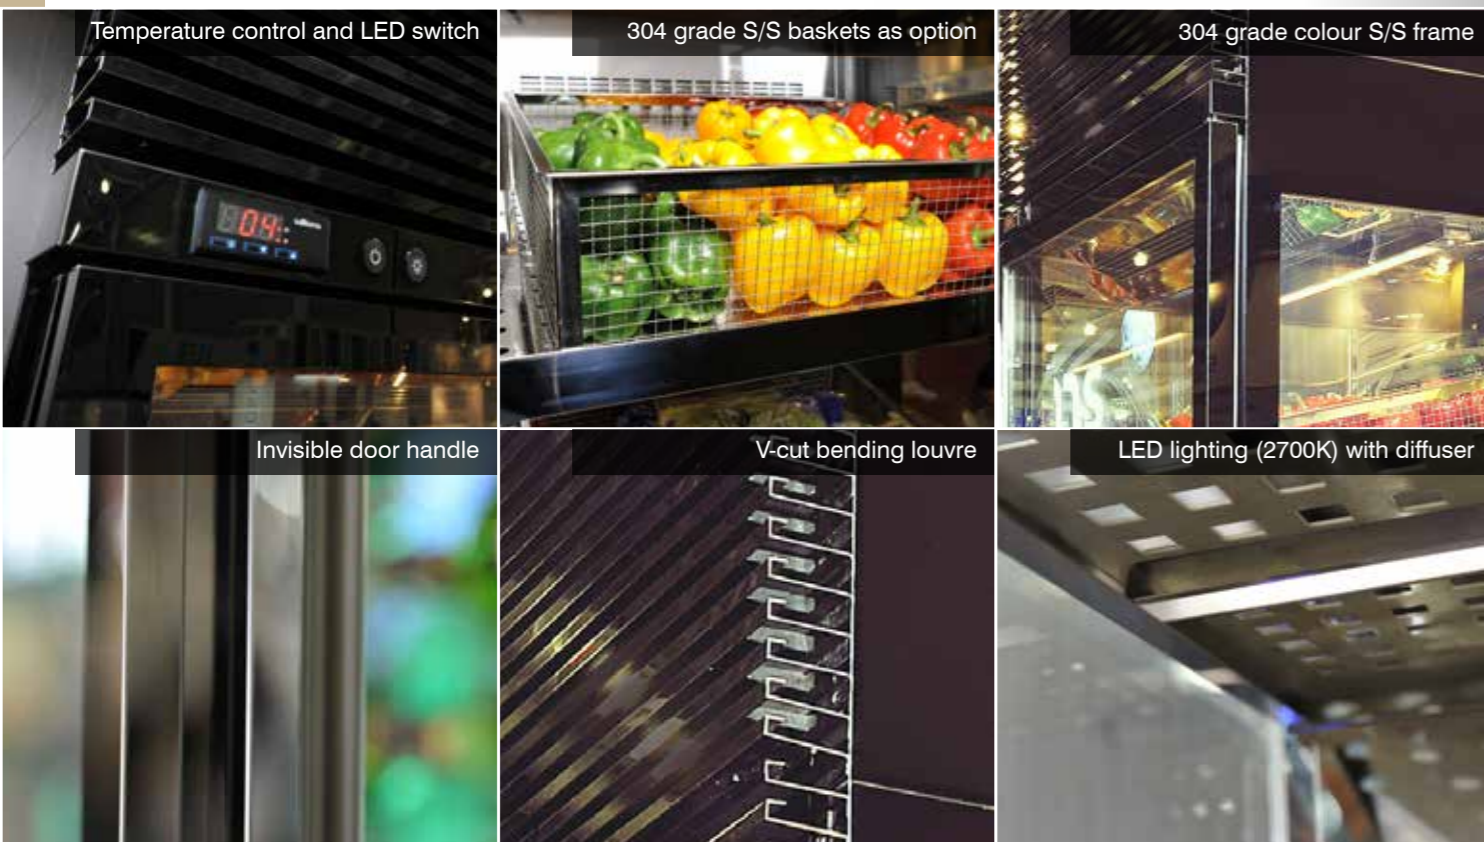

Temperature control and LED switch

304 grade S/S baskets as option

304 grade colour S/S frame

Invisible door handle

V-cut bending louvre

LED lighting (2700K) with diffuser

Temperature Range (°C)

+1 / +4

* Custom-made size is available



Perfect combination of functionality and display purpose

Upright Display Reference





Ice Well
Cold Well
Frost Top

Functional refrigeration equipment allows varied unique interior design for buffet area and restaurants along with easy operation.



1 CW-**2**900.**3**600 (**4**H180)

1 Model	IW (Ice Well) CW (Cold Well) FT (Frost Top)
2 Width	900 (900mm), 1200 (1200mm), 1500 (1500mm)
3 Depth	450 (450mm), 600 (600mm)
4 Internal Height (cold well only)	H180 (180mm), H230 (230mm)



(Images are remote type, standard models are self-contained with stand)

Ice Well (25ømm drainage)

Cold Well (19ømm drainage)

Frost Top (19ømm drainage)

(Ambient temperature requested : 23°C)

Model	External Dim. (mm)
-------	--------------------

IW-900.600	900x600x800H (incl. 600Hmm stand)
IW-1200.600	1200x600x800H (incl. 600Hmm stand)
IW-1500.600	1500x600x800H (incl. 600Hmm stand)
CW-900.600(H180)	900x600x800H (incl. 400Hmm stand)
CW-900.600(H230)	900x600x850H (incl. 400Hmm stand)
CW-1200.600(H180)	1200x600x800H (incl. 400Hmm stand)
CW-1200.600(H230)	1200x600x850H (incl. 400Hmm stand)
CW-1500.600(H180)	1500x600x800H (incl. 400Hmm stand)
CW-1500.600(H230)	1500x600x850H (incl. 400Hmm stand)
FT-900.450	900x450x566H (incl. 466Hmm stand)
FT-900.600	900x600x566H (incl. 466Hmm stand)
FT-1200.450	1200x450x566H (incl. 466Hmm stand)
FT-1200.600	1200x600x566H (incl. 466Hmm stand)
FT-1500.450	1500x450x566H (incl. 466Hmm stand)
FT-1500.600	1500x600x566H (incl. 466Hmm stand)

Temperature Range (°C)

Ice Well
+4 / +10

Cold Well
+5 / +9

Frost Top
-2 / -6

* Custom-made size is available

(IW) 2700K waterproof LED

(CW) 304 S/S perforated shelves

(FT) Static cooling system

(IW) Acrylic base act as light diffuser


(CW) Warm white LED lighting (2700K)

(FT) 19ømm drainage



Designed for indulgent buffet area
IW, CW & FT
Reference



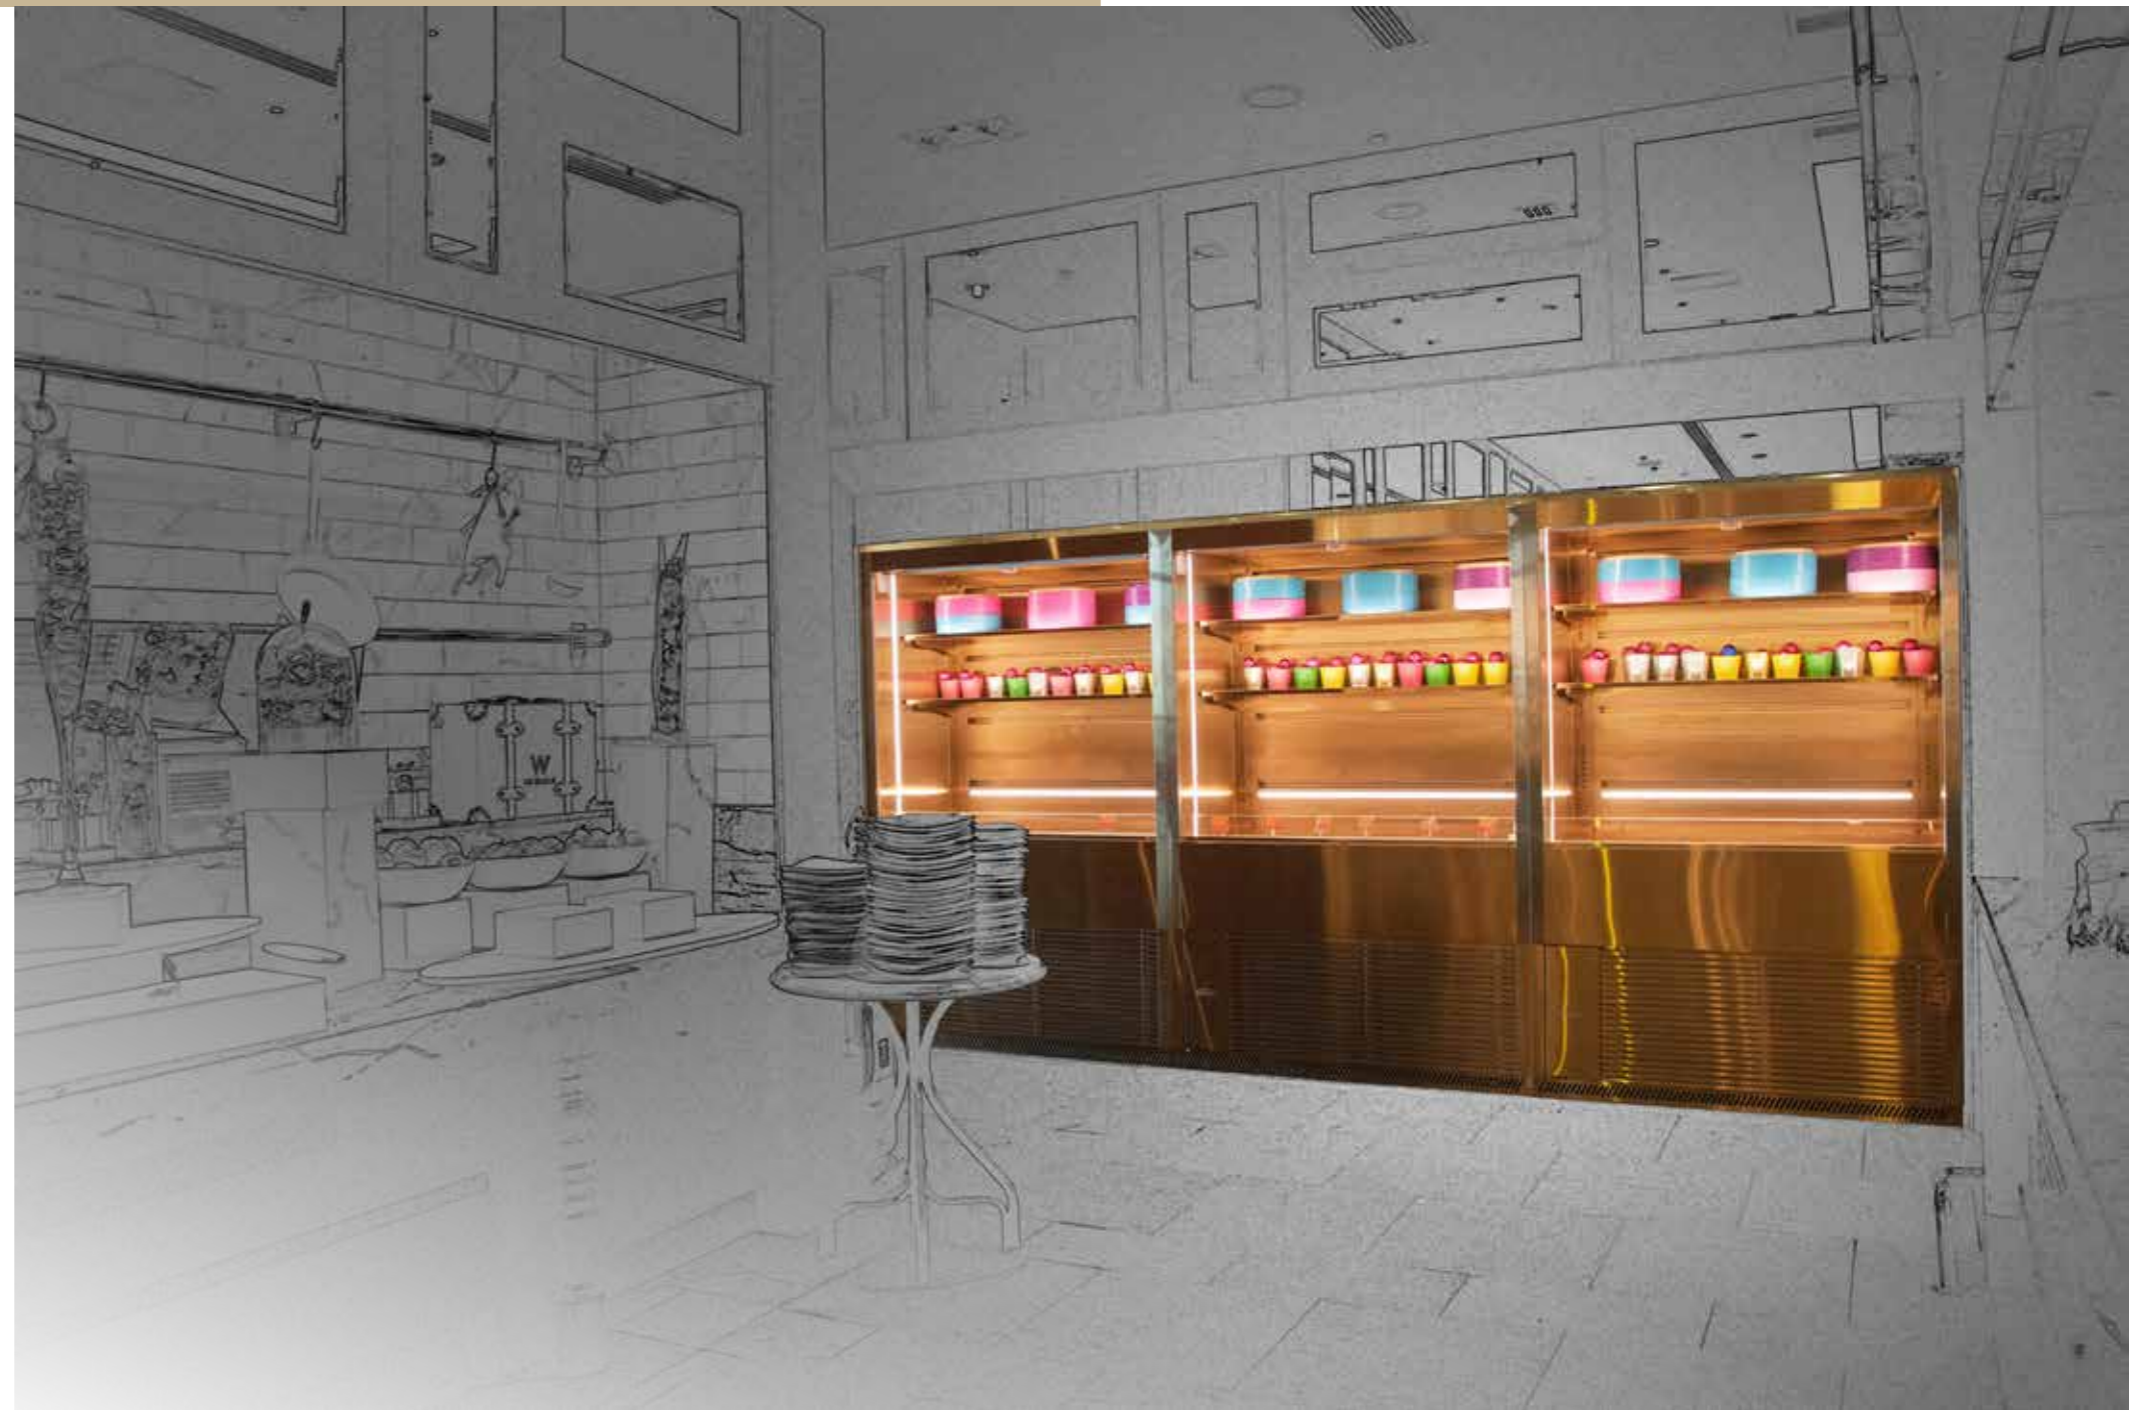

Reach-in Open Display Refrigerator

Number of dishes selection is important to a buffet area other than the food quality. Reach-in open display is an effective way to raise the offers of dishes for customers and also to minimise the space restructuring.



Efficient air flow design



Fitted with night blind

¹ OD - ² R - ³ 1200

1 Model	OD (Reach-in Open Display Refrigeration)
2 Condensing unit & louvre type	R (Remote with stand) U (Self-contained with V-cut bending louvre)
3 Width	900 (900mm), 1200 (1200mm), 1500 (1500mm)



Reach-in Open Display Refrigerator

(190mm drainage) (Ambient temperature requested : 23°C)

Model	External Dim. (mm)
OD-R-900	900x650x1800H
OD-R-1200	1200x650x1800H
OD-R-1500	1500x650x1800H

* Custom-made size is available

Temperature Range (°C)

+6 / +9



Fitted with ID cladding



Fitted with ID cladding

Same space, wider choice


Reach-in Open Display Reference



Stairway Display Refrigerator

Foodies love to see the picture full of tasty foods. The stairway type presentation allows the dishes arranged in a clear and attractive way to everyone.



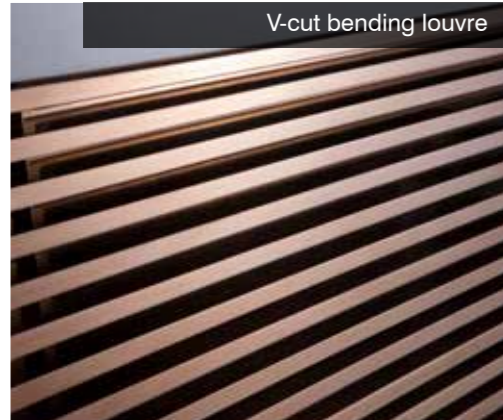

¹ SD - ² U - ³ 1200

1 Model	SD (Stairway Display Refrigeration)
2 Condensing unit & louvre type	U (Self-contained with V-cut bending louvre) R (Remote)
3 Width	1200 (1200mm), 1500 (1500mm), 1800 (1800mm)



Stairway Display Refrigerator

(Ambient temperature requested : 23°C)

Model	External Dim. (mm)
SD-U-1200	1200x900x1200H
SD-U-1500	1500x900x1200H
SD-U-1800	1800x900x1200H

* Custom-made size is available

Temperature Range (°C)

+5 / +8



Fully visible to different foodies

Stairway Display Reference

Front-of-House

Williams
Capability



**Customised
Display
Refrigeration
Solution**

...to fit in with your interior design

Custom-made

Front-of-House

Williams
Capability



**Customised
Display
Refrigeration
Solution**

...to fit in with your interior design

Custom-made

Front-of-House

Williams
Capability



**Customised
Display
Refrigeration
Solution**

...to fit in with your interior design

Custom-made

Front-of-House

Williams
Capability



**Customised
Display
Refrigeration
Solution**

...to fit in with your interior design

Custom-made



Working towards a greener, more environmentally responsible future.



Saving Energy Increasing Recycling Reducing Waste Reducing Emissions

Greenlogic is Williams' commitment to supplying the most energy efficient and sustainable professional refrigeration in today's market. It's not limited to product design, Greenlogic covers our plant, manufacturing and management processes too.

Williams' commitment to green refrigeration stretches back decades. In the 1980s we were the first manufacturer to develop CFC-free insulation. In the 1990s we developed the first catering refrigeration to use an environment-friendly refrigerant with an Ozone Depletion Potential (ODP) of zero.

We've pioneered a raft of greener technologies, ranging from energy-saving Smart Controllers to systems using eco-friendly refrigerants.

Greenlogic Products

Our products are 98% recyclable with the remaining 2% treatable for heat recovery. But to ensure our products are the most sustainable in today's market means considering each and every component.

Not just the contribution they make to the product's overall energy efficiency but the impact they have on the environment, and ensuring they have been produced in a sustainable and ethical manner.

Our CoolSmart Controllers minimise the cabinet's energy consumption through processes such as fan and heater pulsing, intelligent defrost and independent management of evaporator and condenser fans.

Our insulation delivers structural strength and superior thermal properties while minimising environmental impact, through low GWP (Global Warming Potential) and zero ODP (Ozone Depletion Potential).

Recent innovations include low energy fans and bumper bars made from recycled materials, which resist corrosion to maximise service life. All coils are now electro deposition dipped - the most advanced cathodic coating technology available. The process has a lower environmental impact due to a reduction in the amount of solvents used.

A comprehensive choice of other energy saving features and options are available including self-closing doors, heavy duty gaskets, half doors and drawer packs.

Williams follow the AFE Group Ethical Trading Code and ensure compliance with it by our suppliers – assessing and grading each of them on the environmental management of their product and plant.

Greenlogic Manufacturing

Williams holds ISO14001 Environmental Management certification across all of its manufacturing plants in UK, Australia and China, for the design, manufacture, installation and servicing of refrigeration products.

We are committed to reducing our environmental footprint and to becoming a zero to landfill business.

- Pallets are re-used and waste wood recycled.
- Packaging is 100% recyclable, although the bulk of it is reused.
- Waste and by products are dispatched to specialist waste processors.
- Williams have adopted a zero tolerance refrigerant leak strategy. All coils are pretested and again when the refrigeration system has been assembled using industry-best helium sensors.
- Rigorous standards are applied to liquid waste. We only use chemicals that are strictly required by our processes.
- We apply energy-saving technologies, from low energy lighting to plastic curtains that conserve heat in production areas.
- We follow energy-saving procedures, from sharing of office space to do function-testing overnight with off-peak electricity.
- Our transport's carbon footprint is minimised through planned deliveries and full loads.

Staff is encouraged to think about sustainability at all times – to switch off equipment that's not being used, to avoid unnecessary use of resources, etc.

To know more about Greenlogic, Please visit: www.greenlogic.info

Contact Information

UK Office
Bryggen Road, North Lynn Industrial Estate,
King's Lynn, Norfolk PE30 2HZ
T (44) 1553 817000
F (44) 1553 817111
E info@williams-refrigeration.co.uk
W www.williams-refrigeration.co.uk

Hong Kong Office
Unit C, 12/F., Roxy Industrial Centre,
58 - 66 Tai Lin Pai Road, Kwai Chung, New Territories, Hong Kong
T (852) 2407 5422
F (852) 2407 3767
E sales@williams-hongkong.com
W www.williams-refrigeration.com.hk

Shanghai Office
Room 18C, Hai Xing Plaza,
No.1 South Rui Jin Road, Huangpu District, Shanghai, China
Zip code: 200023
T (86) 21 5396 0183
F (86) 21 5396 1335
E sales.service@williams-shanghai.com.cn
W cn.williams-refrigeration.com.hk

Dubai Office
607 Building 1B, Dubai Design District,
P.O. Box 333215, Dubai, United Arab Emirates
T (971) 4 5108203
E sales@williams-dubai.com

Australia Office
38-42 Gaine Road, Dandenong South,
Victoria 3175, Australia
T (61) 3 8787 4747
F (61) 3 8787 4787
E sales@williamsref.com.au
W www.williams-refrigeration.com.au



Allow adequate space for maintenance and ventilation. All refrigeration equipment requires adequate ventilation for efficient and effective performance, avoids direct sunlight and extreme temperature environment. Williams reserve the right to modify design, materials and finish in accordance with its progressive development policy.